

MeiStreamRF Plus

Class C Bulkmeter with eRegister for cold potable water DN 40...150 PN 16



Main characteristics

- Register with integrated radio communication and data logger
- LC-display for consumption and status information
- Secured encrypted data transmission
- Meter with MID pattern approval acc. to annex MI001
- Exchangeable metrological unit with MID pattern approval acc. to annex MI001
- Unique measuring range; Q_3/Q_1 315 in horizontal installation
- High overload capability
- No straight inlet length necessary (U0D0 acc. to OIML R49 and EN 14154)
- Meter body in short (WP) and long (WS) overall length acc. to DIN 19625 and EN 14154 available
- Meter can be submerged; protection class IP68
- Used materials are temperature resistant up to 70 °C

Applications

- Metering endpoint in radio based Smart Water Networks
- Measurement for billing of potable water up to 50 °C
- Measurement of medium and high flowrates
- Measurement of low flow e. g. in light load periods
- For leakage detection

Available options

- Radio communication with different frequencies
- 1/4" pressure monitoring port

Approval Mark

Meter cpl. and exchangeable metrological unit

Marking CE M-XX* 0102
DE-09-MI001-PTB 012

* year of production

Environmental Conditions

Acc. to ISO 4064-1:2014

Environmental class B

Environmental temperature 5-70 °C

Electromagnetic environmental class E1

Performance Data






Metrological Data acc. to Manufacturers Values

	Size	DN	40	50	65	80	100	150
Q ₅	Max. Peak Flow	m ³ /h	50	55	60	120	160	400
Q ₃ '	Continuous Flow	m ³ /h	30	35	40	63	100	250
Q ₂	Transitional Flowrate horizontal acc. to MID	m ³ /h	0.13	0.13	0.16	0.25	0.4	0.63
Q ₁ '	Minimum Flow horizontal	m ³ /h	0.08	0.07	0.1	0.13	0.2	0.35
	Starting Flow	m ³ /h	0.03	0.03	0.035	0.04	0.065	0.12

Metrological Data acc. to 2014/32/EU (MID)

	Size	DN	40	50	65	80	100	150
Q ₄	Overload Flowrate acc. to MID	m ³ /h	31.25	31.25	50	78.75	125	312.5
Q ₃	Permanent Flowrate acc. to MID	m ³ /h	25	25	40	63	100	250
Q ₂	Transitional Flowrate horizontal acc. to MID	m ³ /h	0.13	0.13	0.16	0.25	0.4	0.63
Q ₁	Minimum Flowrate horizontal acc. to MID	m ³ /h	0.08	0.08	0.1	0.16	0.25	0.4
Q ₃ /Q ₁	max. Ratio		315	315	400	400	400	630
Q ₃ /Q ₁	Standard Marking		315	315	315	315	315	315
Δp	Headloss at Q ₃ acc. to EN 14154	bar	0.09	0.08	0.17	0.07	0.16	0.14


Dial

-  Alarm is triggered
-  Low battery level is reached
-  Radio is activated
-  System is set up in hydraulic testing mode
-  ⊕⊖ indicates positive or negative flow
- m³** indicates the unit

Nominal diameter DN	Smallest reading m ³	Max. reading m ³
40 ... 100	0.001	999,999.999
150	0.01	9,999,999.99




DN 40 ... 125




DN 150

Typical Headloss

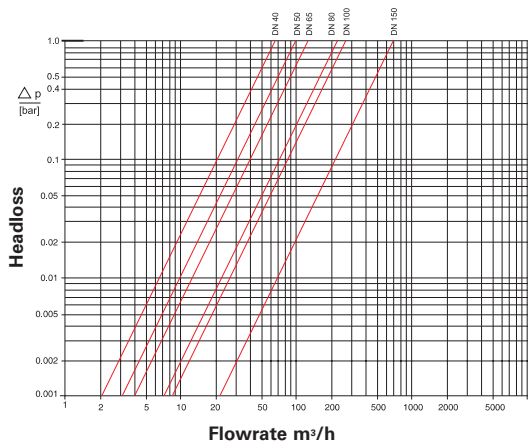

Typical Error Curve

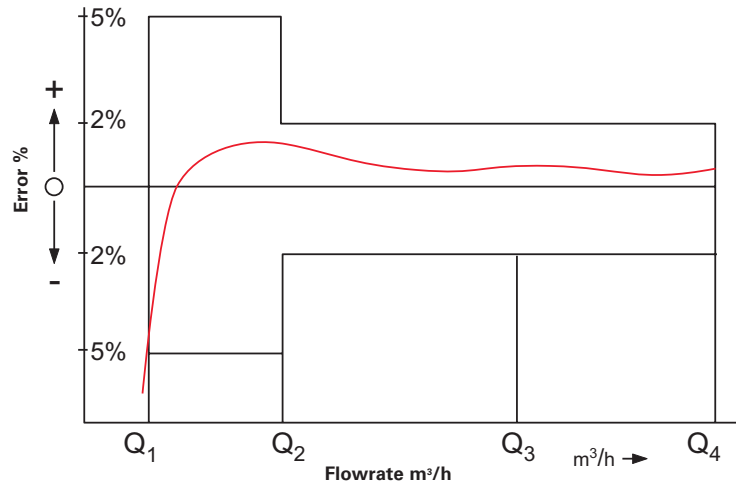

Installation

Pipe	horizontal	—
Meter head	upwards	↑

Installation Requirements

- Unrestricted straight pipe upstream 0 x DN
- No abrupt restrictions directly downstream of the meter


Materials

Body	Cast iron
Measuring element	Plastic
Rotor	Plastic
Battery	Lithium
We also use the following materials	Brass Stainless steel

Available Lengths

Nominal diameter		40	50	65	80	100	150
Overall length L WS (DIN / ISO)	mm		270 / 300	300	300 / 350	360 / 350	500
Overall length L WP (DIN / ISO)	mm	220	200	200	225 / 200	250	300

Dimension Picture

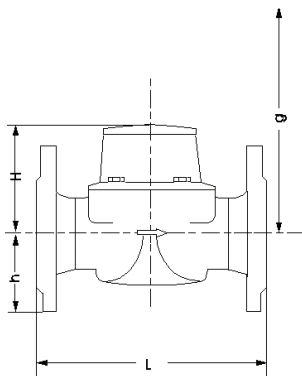

Dimension and Weights PN 16

Nominal diameter				40	50	50	50	65	65	80	80
Dimensions	Overall length	L	mm	220	200	270	300	200	300	200	225
	Height	H	mm	120	120	120	120	120	120	150	150
		h	mm	69	73	73	73	85	85	95	95
	Dismantling height	g	mm	200	200	200	200	200	200	270	270
Weights	Meter cpl.		kg	7.5	7.8	9.6	9.9	10.1	12.0	13.8	14.2
	Measuring insert		kg	1.5	1.5	1.5	1.5	1.5	1.5	3.2	3.2
	Body		kg	6.0	6.3	8.1	8.4	8.6	10.5	10.6	11.0

Nominal diameter				80	80	100	100	100	150	150
Dimensions	Overall length	L	mm	300	350	250	350	360	300	500
	Height	H	mm	150	150	150	150	150	177	177
		h	mm	95	95	105	105	105	135	135
	Dismantling height	g	mm	270	270	270	270	270	356	356
Weights	Meter cpl.		kg	16.3	17.7	18.2	20.0	20.2	35.9	44.2
	Measuring insert		kg	3.2	3.2	3.2	3.2	3.2	5.9	5.9
	Body		kg	13.1	14.5	15.0	16.8	17.0	30.0	38.3

Order Information

_____	Type
_____	Size
_____	Max. medium temperature
_____	Nominal pressure
MeiStream Plus, DN 50, T50, PN16	
Drilling EN 1092 PN16 _____	Drilling pattern
Length 270 mm _____	Body length
eRegister / m ³ _____	Register type / unit
with MID conformity _____	Approval standard

MeiStreamRF Plus infrastructure

The MeiStreamRF Plus has SensusRF integrated technology providing the advantages of both uni- and bidirectional system architecture as described below. SensusRF is the optimized license free radio system for battery driven endpoints and repeaters. Scalable for mobile and remote reading without exchange of components, it is available in 433 MHz and 868 MHz.

OMS® compatible.

SensusRF offers two communication modes

1. Fixed Radio Network

- Auto configuration wizard (gateway sniffing for endpoints and repeaters)
- Integrating repeaters (up to 7 hops in a chain)
- Self-healing network (using alternative routes)
- Meter reading transparent and local
- Fast track alarms
- DMA snap shot (snap shot of a water network for evaluation)
- TCP/IP technology for the WAN communication
- High level of data security (end-to-end encryption)
- Enables cloud technologies, FTP and other remote database applications

2. Mobile read - Walk-by / Drive-by

- Unidirectional telegrams
- Bidirectional communication
- Spontaneous reception possible without route
- Configuration of the endpoint


SIRT (Sensus Interface Radio Tool)

SIRT is a radio modem for SensusRF radio, connected to a handheld via Bluetooth and using SensusREAD Mobile Reading software with the following features:



- Installation and readout of devices
- Reception of frequently transmitted radio messages from Sensus RF radio endpoints
- Request additional information from the radio endpoints
- Change configuration of radio endpoints (alarm, level settings...)

For further information please refer to the SensusRF brochure.

MeiStreamRF Plus Fixed radio network - Remote Access & Monitoring

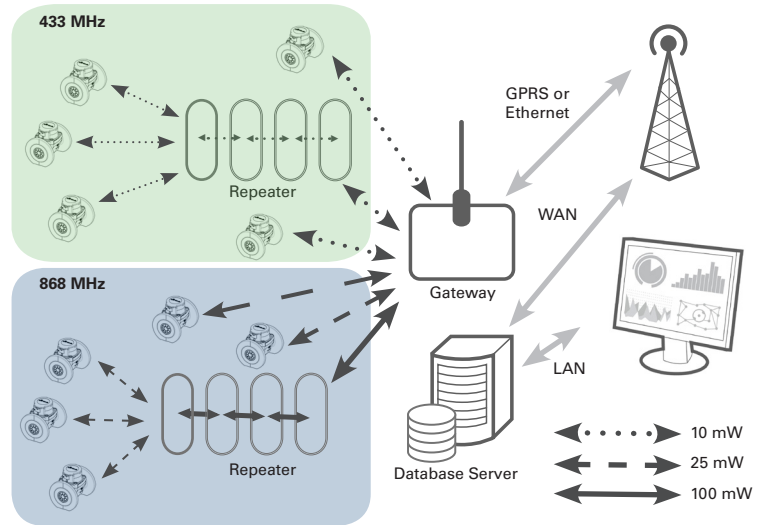

Unidirectional/Bidirectional communication

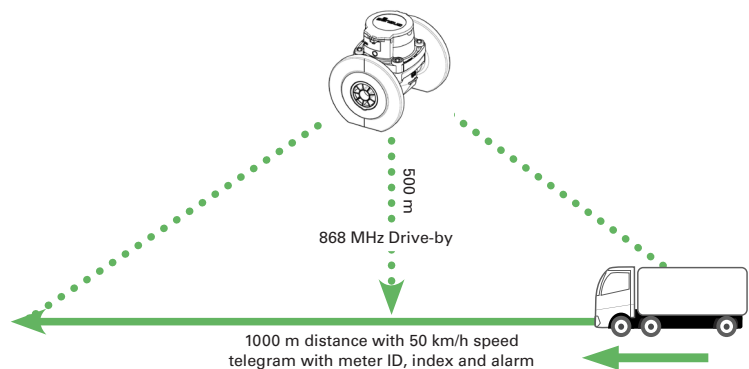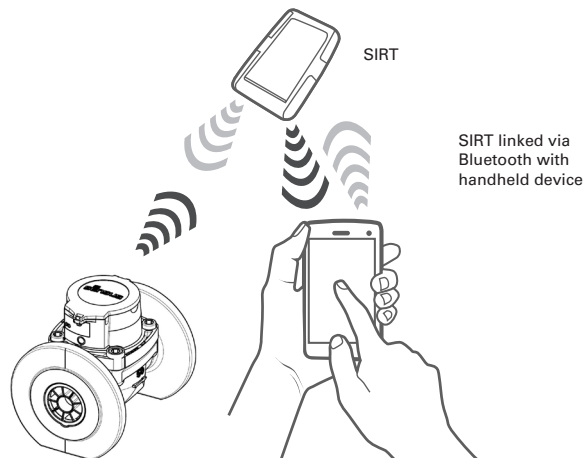

qualityaustria
Succeed with Quality

Certified according to ISO 9001
Quality Management System Quality Austria Reg.no. 3496/0

UK & Ireland Enquiries

Sensus UK Systems Ltd, 3 Lindenwood Crockford Lane, Chineham Business Park
Basingstoke RG24 8QY UK
T: +44 (0) 1256 372800 F: +44 (0) 1256 707203 Email: info.gb@xylem.com www.sensus.com

International Enquiries

Sensus GmbH Ludwigshafen, Industriestrasse 16, 67063 Ludwigshafen Germany
T: +49 (0) 621-6904-0 F: +49 (0) 621-6904-1409 Email: info.int@xylem.com www.sensus.com